



**ITEM NO. AND DESCRIPTION**

- 1 WATER MAIN.
- 2 WATER MAIN SIZE BY 4" CONCENTRIC REDUCER MJ.
- 3 ROMA GRIP MJ RESTRAINT SYSTEM. RESTRAINT SYSTEM TO INCLUDE MANUFACTURER'S LISTED NUMBER OF BELL & SPIGOT JOINTS UPSTREAM.
- 4 4" FOSTER ADAPTER.
- 5 KUPFERLE FOUNDRY MAINGUARD - MODEL #7600, 4" BURY.
- 6 POUR IN PLACE THRUST BLOCK SIZED FOR WATER MAIN DIAMETER - TERMINUS OF THRUST BLOCK TO BE WITH KEYWAY IN SOIL OR TAPER AS SHOWN. COVER BLOW-OFF BASE AND FITTINGS WITH MIN. 6 MIL PLASTIC SHEETING BEFORE POURING THRUST BLOCK.
- 7 DRAIN ROCK - ENCLOSE RESTRAINED JOINTS AND PROVIDE DRAIN AREA.
- 8 1" MIN. MASONRY BLOCKS
- 9 ARMORCAST 17" X 30" 20,000 LB. RATED ONE-PIECE COVER .
- 10 4" MALE CAM LOCK FITTING WITH CAP.
- 11 10 GAUGE SOLID COPPER TRACER WIRE.

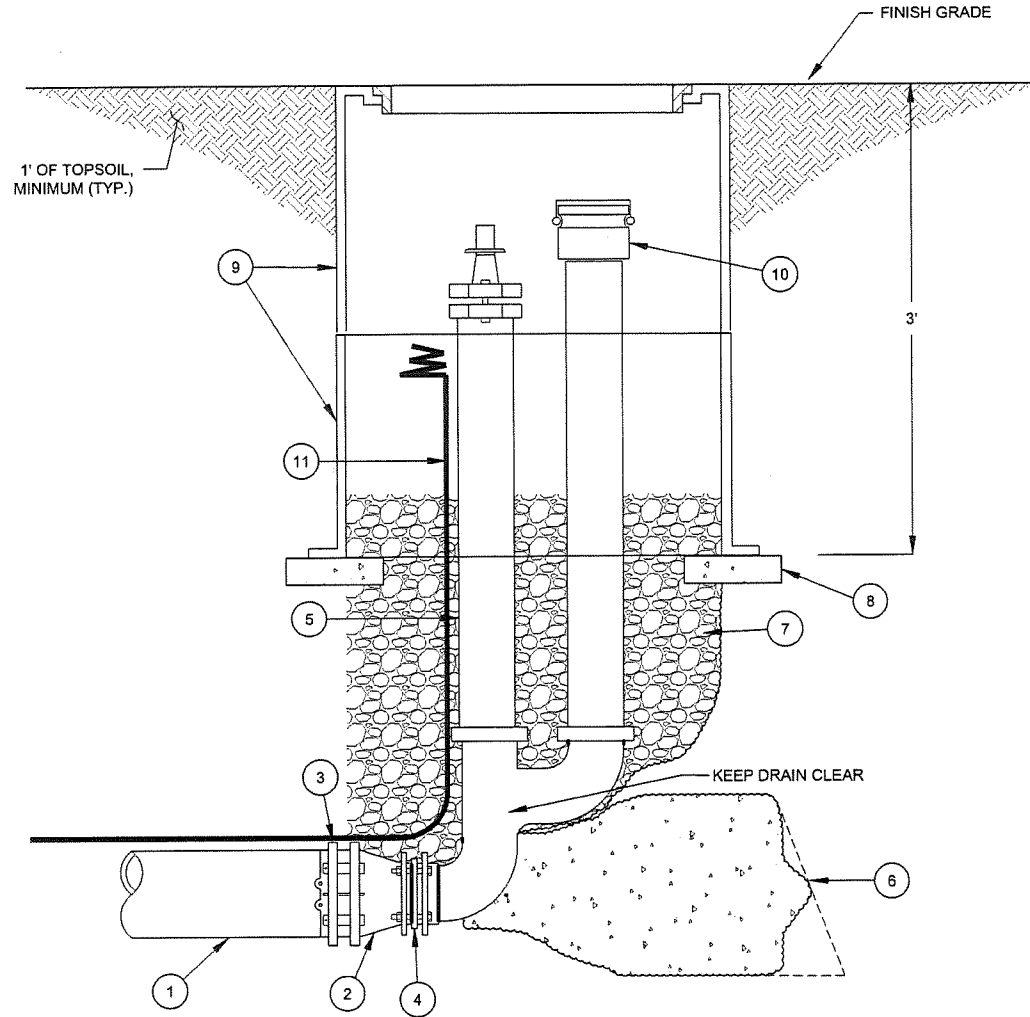

| REVISIONS |             |
|-----------|-------------|
| DATE      | DESCRIPTION |
|           |             |
|           |             |
|           |             |
|           |             |



|  |              |                              |
|--|--------------|------------------------------|
| <b>HAYDEN LAKE<br/>IRRIGATION DISTRICT</b> |              | HLID DETAIL #:<br><b>006</b> |
| <b>4" BLOW-OFF</b>                         |              | DATE: July, 2022             |
| SCALE: NONE                                | APPROVED: BR |                              |
| DWG: 006 - 4IN_BLOWOFF(11-2019).dwg        |              |                              |